

	Henrik Olsson	Datasheet	
		Revision #: A	HW Rev.A
		Date: 2010-06-06	FW Rev.1

Servo processor module

For use with the HP-UHU and other UHU based servo drives

KEY FEATURES

- Pin compatible with the original UHU chip.
- PID loop with velocity and acceleration feed-forward.
- Adjustable servo loop rate.
- Sliding scale following error trip limit.
- Data recorder.
- Antidither with settable region.

KEY BENEFITS

- Higher step-rates
- Higher encoder resolution

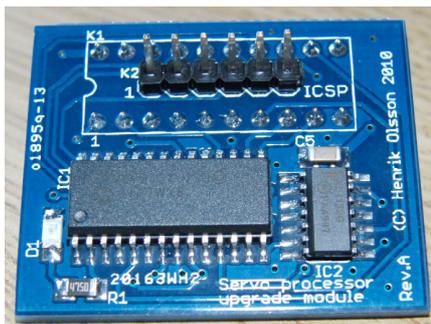


Photo of the module.

Product Highlights

The servo processor module will boost the performance of your UHU based servo drive by allowing higher encoder resolutions and higher step rates than ever before. It will keep up with step rates above 1Mhz and encoder frequencies of up to 2.5Mhz.

Pin compatible with the UHU chip

The module was designed to be a drop in replacement for the UHU chip. It features the same pin out and has the same inputs and outputs as the UHU chip. See page 2 for details.

Enhanced PID loop

Some of the settings for the PID loop are:

- Proportional, integral & derivative gain
- Adjustable integral time constant
- Velocity and acceleration feed forward gain
- Adjustable output offset

Sliding scale following error

With the sliding scale following error feature it is possible to allow a larger following error for a higher commanded velocity yet keep a very "tight" limit at slower speeds. The point at which the servo trips due to a following error "slides" a long a linear curve based on the commanded velocity.

Data recorder

The data recorder feature allows one of several internal values like following error or motor velocity to be recorded into a 128 entries deep buffer at a selectable rate up to 2800Hz. When the buffer is full the values are sent to the PC as plain text and can then be plotted in EXCEL etc.



Henrik Olsson

Datasheet


Revision #: A

HW Rev.A

Date: 2010-06-06

FW Rev.1

Technical specifications

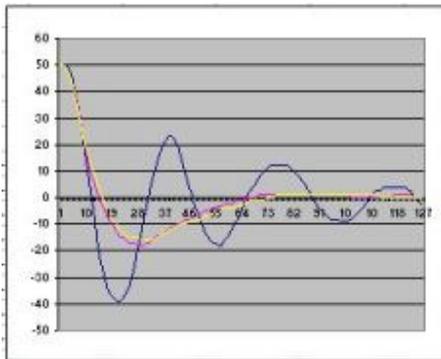

EXCEL plot of step response.



Module mounted on HP-UHU

ADDITIONAL INFORMATION

More information can be found at:
www.henriksplace.se/servo

General specifications

Step frequency	>1MHz	Verified on HP-UHU
Encoder frequency	2.5MHz	After quad. decoding
Baud rate	57600 8N1	TTL Serial
Servo loop rate	1220-2800Hz	Adjustable in 10 steps
Operating voltage	4.7V – 5.3V	5V nominal
Current consumption	TBD	
PWM Output freq.	19.455kHz	Locked antiphase
Output swing	8-92%	Default 13-87%
Physical size	41 X 31mm	

Module pin out

Pin 1	Reset\	Pin 11	N/U
Pin 2	RXD (To module)	Pin 12	Encoder A
Pin 3	TXD (From module)	Pin 13	Encoder B
Pin 4	N/U	Pin 14	Fault input
Pin 5	N/U	Pin 15	PWM output
Pin 6	Step (active low) *	Pin 16	Enable output
Pin 7	Direction	Pin 17	Fault Output
Pin 8	N/U	Pin 18	Firmware status *
Pin 9	N/U	Pin 19	N/U
Pin 10	GND / Vss	Pin 20	+5v / Vcc

*See note below.

Differences between the UHU and the module

- The servo processor module “steps” on the falling edge of the step signal while the UHU steps on the rising edge. Inverting the polarity of the step-pulse in the control software is recommended.
- The firmware status output operates differently on the servo processor module than on the UHU chip. More details regarding this are available in the manual.
- The baud rate for communicating with a host PC is different than on the original UHU chip.
- The output swing is slightly higher on the module than on the UHU chip. If 100% compatibility with the UHU chip is needed in this respect the output swing can be further limited thru the modules C-parameter.

This document is copyright © June 6, 2010 Henrik Olsson. All rights reserved. This document is provided for information purposes only; contents are subject to change without notice. It is not warranted to be error-free, nor subject to any warranties.

Page #:

2 of 2

www.henriksplace.se/servo